

Silencieux circulaire droit

SLXU 50



Description

SLXU 50 est un silencieux circulaire droit.

Classe d'étanchéité à l'air D.


Isolation d'épaisseur 50 mm.

Isolant acoustique en laine minérale.

Corps en acier galvanisé.

Testé selon la norme ISO 7235.


Dimensions et données acoustiques

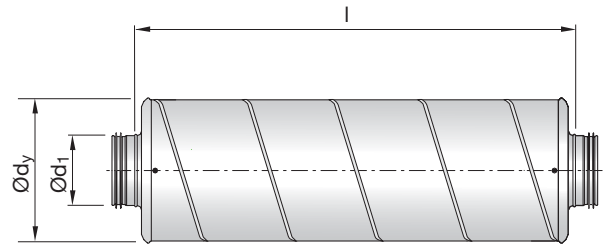

Ød ₁ nom mm	l _{nom} mm	63	125	250	500	1k	2k	4k	8k	Ød _y mm	l mm	m kg
100	300	0	4	8	11	17	26	16	16	210	360	2,0
100	600	1	6	13	19	29	45	28	23	210	660	3,0
100	900	2	8	19	26	42	50	42	30	210	960	5,0
125	300	0	3	7	9	17	25	15	14	235	365	3,0
125	600	1	6	10	15	26	40	24	22	235	665	4,0
125	900	2	7	15	19	36	50	30	21	235	965	7,0
160	300	0	3	5	10	21	20	13	13	270	375	3,0
160	600	1	5	8	13	24	29	14	15	270	675	6,0
160	900	2	5	11	18	35	42	21	16	270	975	8,0
200	600	1	3	6	11	25	20	11	12	310	685	7,0
200	900	1	4	8	13	27	26	13	12	310	985	10,0
250	600	0	2	4	9	20	14	7	8	365	600	9,0
250	900	1	4	8	15	30	19	10	11	365	900	12,0

Caractéristiques techniques

Perte de charge Δp_t [Pa/m]

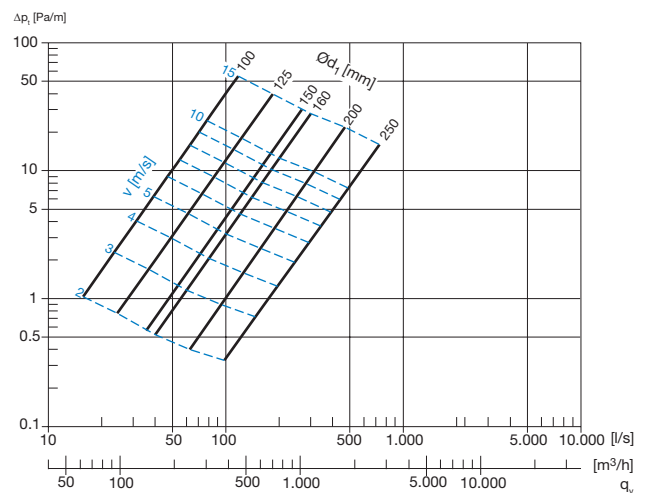

Codification

Produit	SLXU	aaa	bbb	50
SLXU				
Diam. raccordement Ød₁ nom				
100 - 250				
Longueur, mm (l_{nom})				
300 - 900				
Épaisseur matériau isolant				
50 mm				

Exemple: SLXU - 125 - 600 - 50

