



Sifflet grillagé

AVU

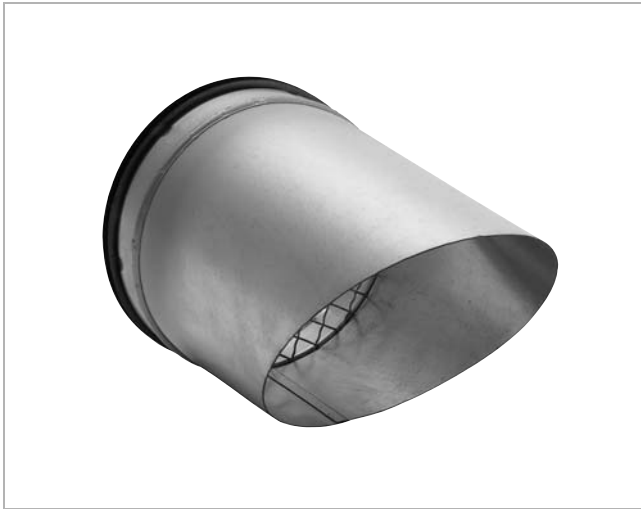

Dimensions

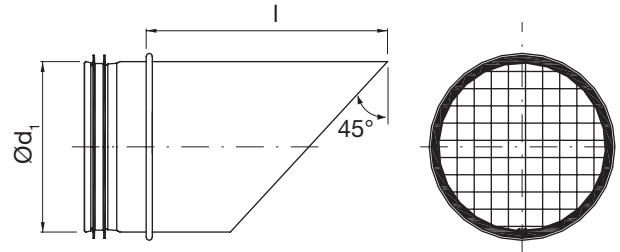

Description

Angle standard 45°.
Autres angles sur demande.

Ød ₁ nom	l mm	m kg
80	180	0,17
100	200	0,22
125	225	0,29
160	260	0,41
200	300	0,56
250	350	1,00
315	415	1,40
355	455	1,70
400	500	2,50
450	550	3,00
500	600	3,60
560	660	4,30
630	730	5,20
710	810	8,40
800	900	10,0
900	1000	12,0
1000	1100	15,0
1120	1220	19,0
1250	1350	23,0

Codification

